PGBS7T4



PIGGY-BACK SLAVE ATTACHMENT

PGBS7T4 piggy-back slave attachment is a removable unit under any 20 FT ISO container spreader dedicated for the handling of swap bodies, trailers and bottom lift containers.

- **4 hydraulic foldable grapple arms in an automatic sequence**
- **Mounting arrangement to fit the spreader**
- **Hydraulic arms folding**
- **Hydraulic clamp and unclamp**
- **Solenoid valves for all hydraulic functions**
- **LED functions indication lights**

TECHNICAL SPECIFICATIONS

Lifting capacity (SWL)	***7'000 Kg***
Type of lifting system	***Twist-lock in 20 FT ISO position***
Lifting system	***Corner castings at 20 FT ISO position***
Grapple arms length	***3600 mm***
Leg clamping distance, min	***1766 ± 60 mm***
Leg clamping distance, max	***3200 ± 60 mm***
Leg centre distance, min	***4876 mm***
Max working pressure	***140 bar***
Hydraulic flow	***40-60 L/min***
Electric control voltage	***24 VDC***
Spreader weight	***2'200 Kg***
Colour	***Black grey RAL 7021 (150 µm th.)***

Mec Service Equipment srl
29010, Calendasco (Piacenza)
Zona industriale Pontetrebbia, via Piacenza 45
Mail: info@mecserviceitalia.it
Web: www.mecservice-equipment.com



All specifications are subject to change without notice. A list of options enables you to adapt the product more precisely to your needs and further information is available on request

Mec Service Equipment srl
29010, Calendasco (Piacenza)
Zona industriale Pontetrebbia, via Piacenza 45
Mail: info@mecserviceitalia.it
Web: www.mecservice-equipment.com

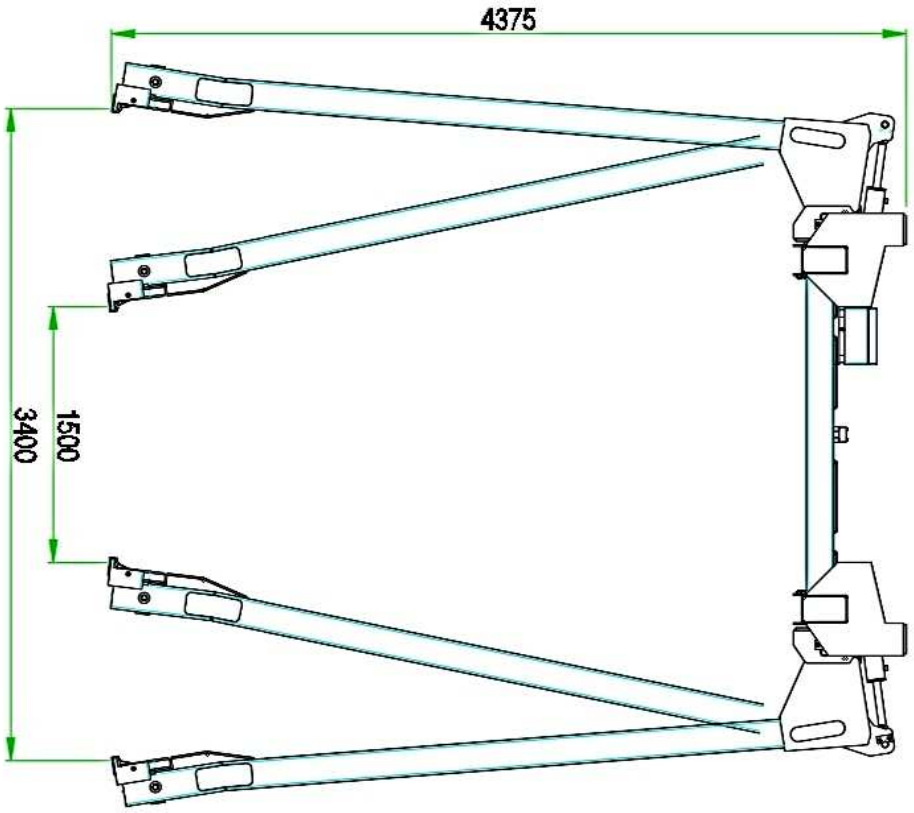
4375
3400
1500

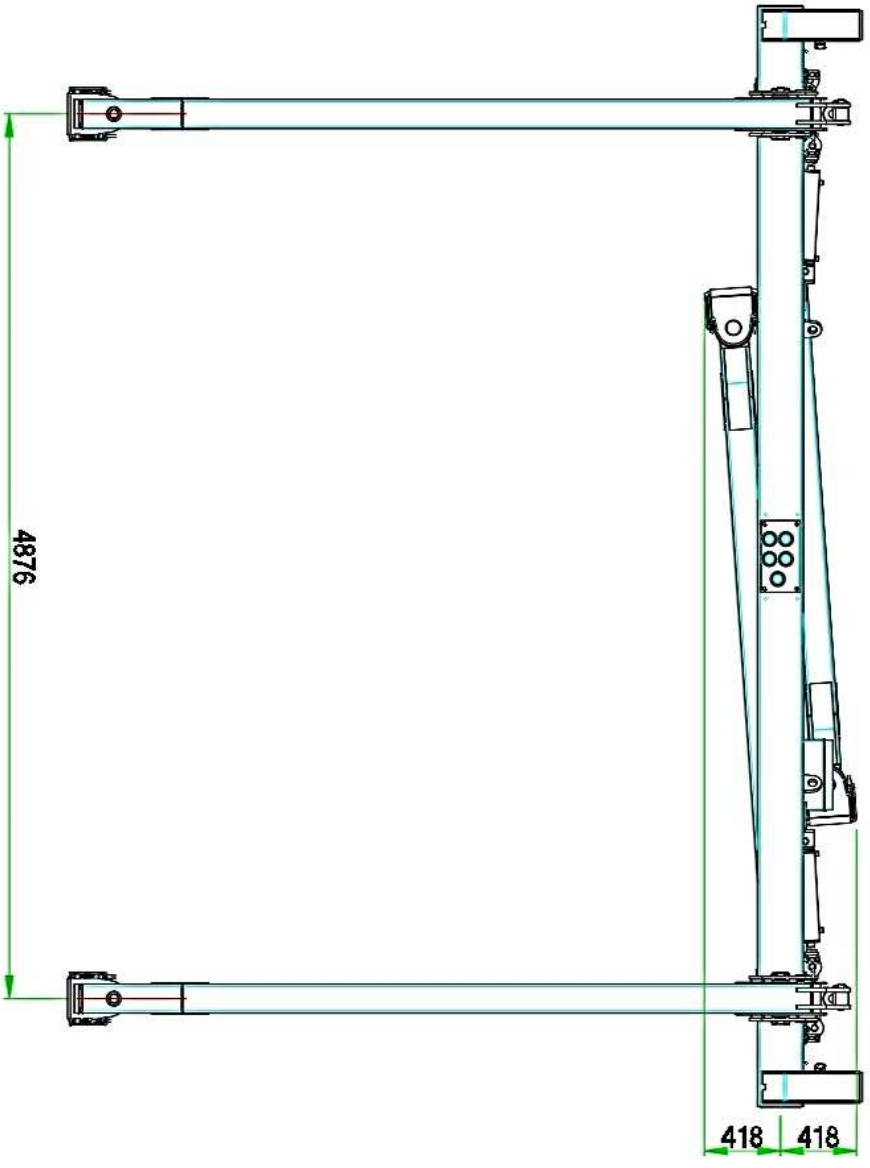
4876
418
418

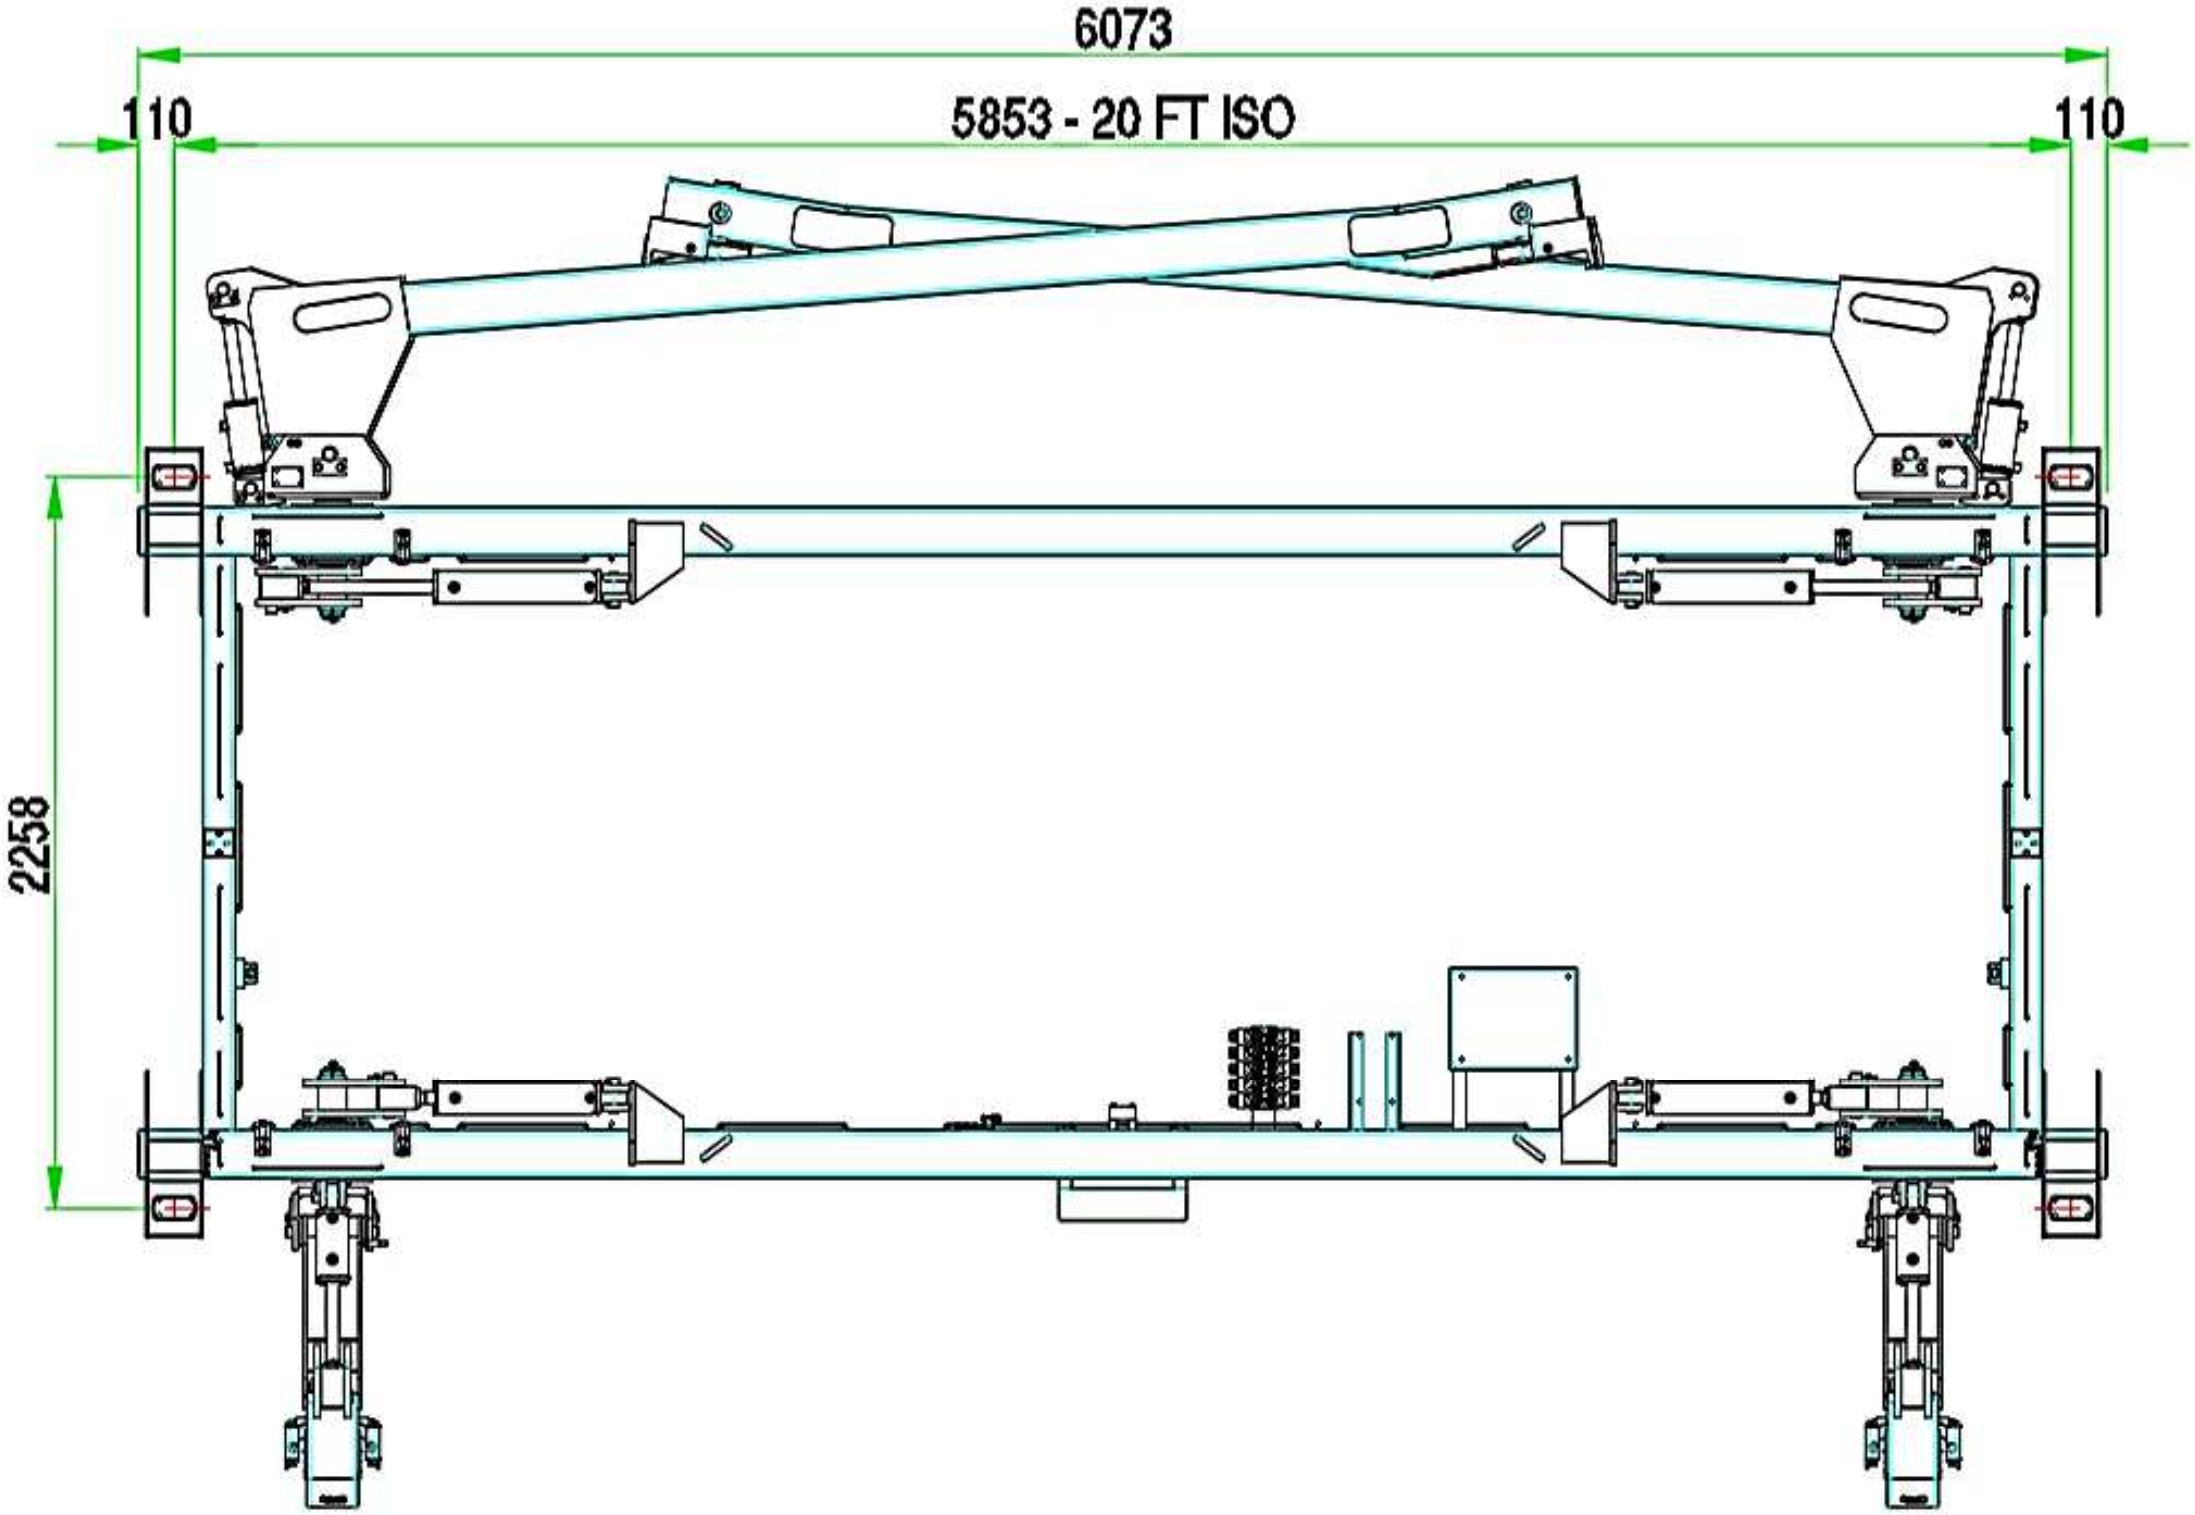
6073
110
5853 - 20 FT ISO
110
2258