SPRFSA56T – SPRFSA56T1



O.H. SLAVE ATTACHMENT SPREADER

SPRFSA56T is a telescopic overheight slave attachment spreader with vertical twistlocks for handling of a single load ISO containers/flat.

- **Adjustable 20/40 FT ISO depending on mother spreader position**
- **Remote controlled**
- **Full hydraulic and electric independent**
- **Range legs height from 3'500 mm to 4'500 mm**
- **Electrical and mechanical twistlock safety system**
- **Twistlock emergency system**
- **LED indication lights**
- **LED battery charge status lights**

TECHNICAL SPECIFICATIONS

Lifting capacity (SWL)	***56'000 Kg***
Telescopic positions	***20 FT ISO / 40 FT ISO***
Telescoping speed (from 20 to 40 FT ISO)	***depending on mother spreader***
Telescoping speed (from 40 to 20 FT ISO)	***depending on mother spreader***
Sideshift	***depending on mother spreader***
Mechanical pile slope	***depending on mother spreader***
Max working pressure	***70 bar***
Hydraulic flow	***Independent hydraulic unit (remote controlled)***
Electric control voltage	***24 VDC***
Remote control range	***100 mt***
Lifting system	***Vertical ISO twistlocks***
Type of stacking	***Normal and block stacking***
Spreader weight	***4'800 Kg (3'500 mm height standard version)***
Colour	***Yellow RAL 1021 (150 µm th.)***

Mec Service Equipment srl
29010, Calendasco (Piacenza)
Zona industriale Pontetrebbia, via Piacenza 45
Mail: info@mecserviceitalia.it
Web: www.mecservice-equipment.com



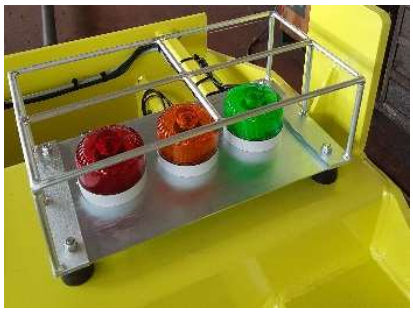







All specifications are subject to change without notice. A list of options enables you to adapt the product more precisely to your needs and further information is available on request

Mec Service Equipment srl
29010, Calendasco (Piacenza)
Zona industriale Pontetrebbia, via Piacenza 45
Mail: info@mecserviceitalia.it
Web: www.mecservice-equipment.com

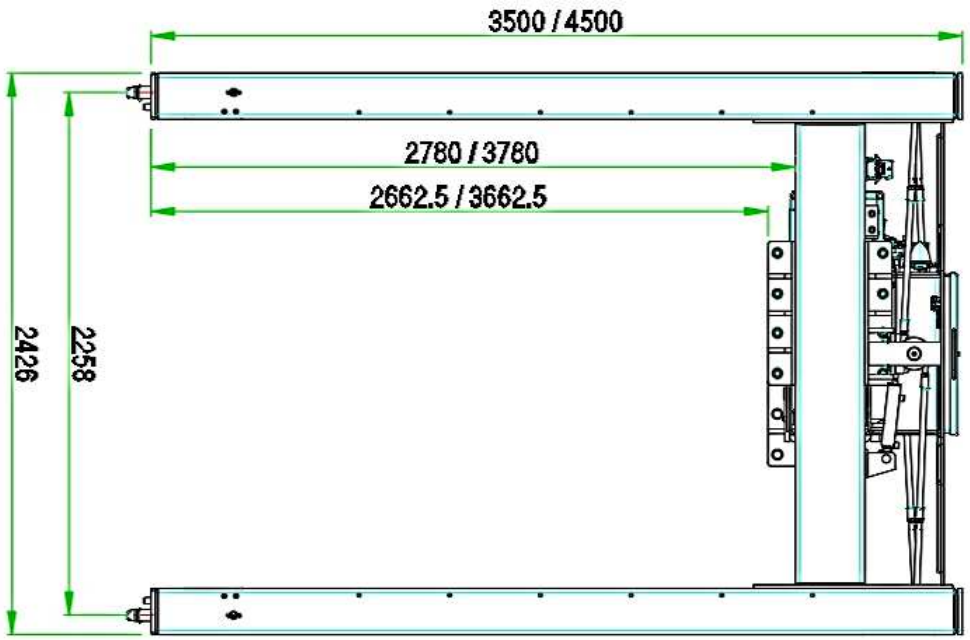
3500 / 4500
2780 / 3780
2662.5 / 3662.5
2426
2258

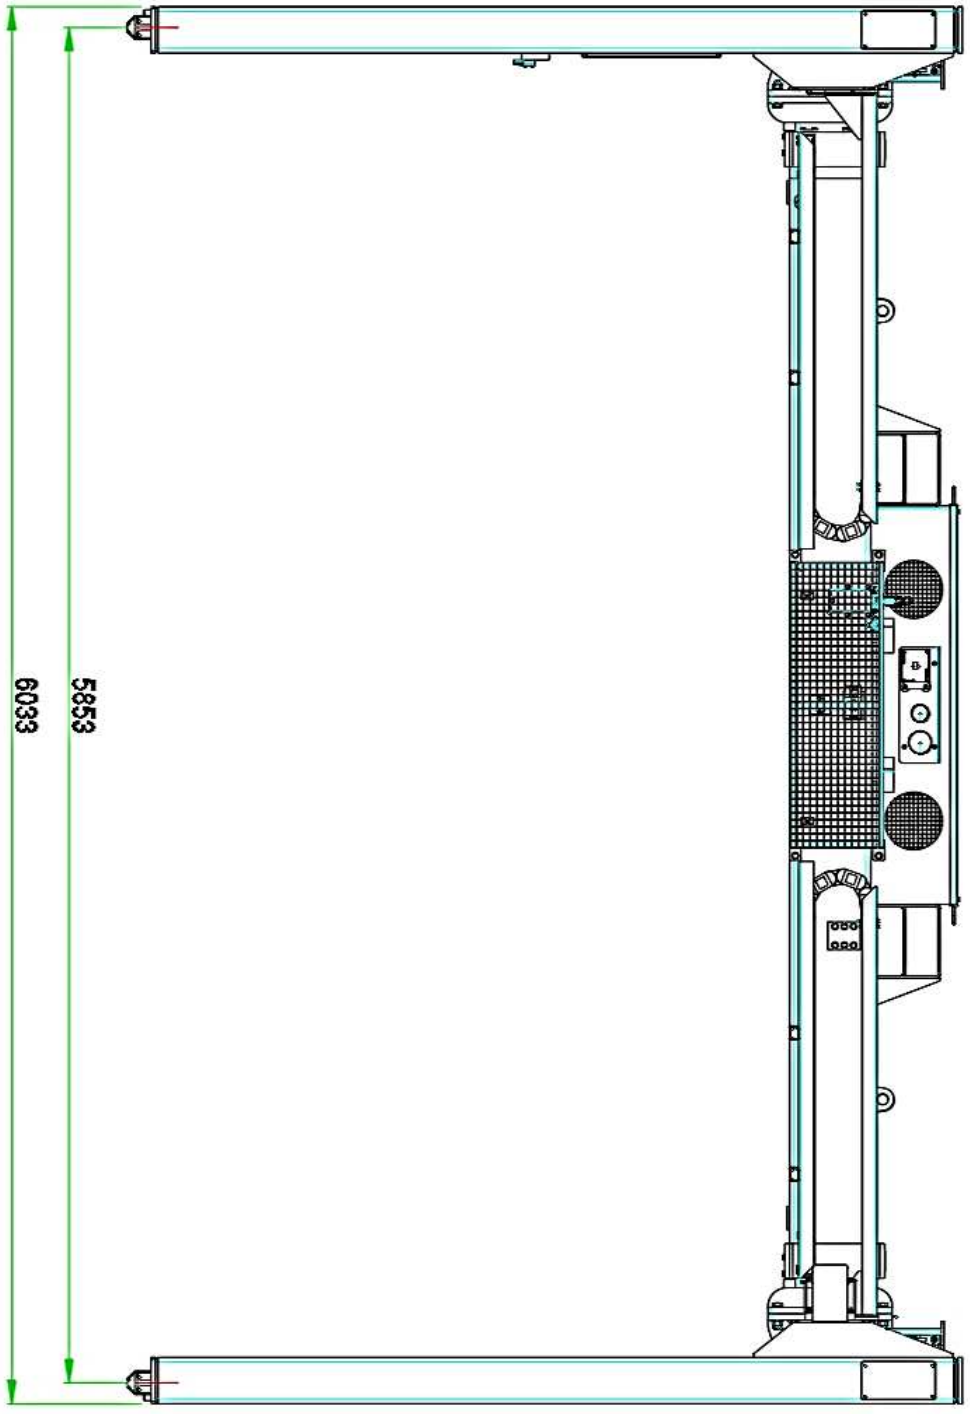
6033
5853