SPRV10T



EMPTY CONTAINER HANDLING SPREADER

SPRV10T is a telescopic side lift spreader with vertical twistlocks for handling of a single empty ISO containers.

- **Independent mechanical pile slope**
- **Hydraulic telescoping and sidelift**
- **Two vertical ISO twistlocks**
- **Solenoid valves for all hydraulic functions**
- **Electrical and mechanical twistlock safety system**
- **LED indication lights**
- **LED work lights**

TECHNICAL SPECIFICATIONS

Lifting capacity (SWL)	***10'000 Kg***
Telescopic positions	***20 FT ISO / 40 FT ISO***
Telescoping speed (from 20 to 40 FT ISO)	***<= 14 sec (20°C tested)***
Telescoping speed (from 40 to 20 FT ISO)	***<= 17 sec (20°C tested)***
Sideshift	***± 600 mm***
Mechanical pile slope	***150 mm (20 FT ISO)***
	150 mm (40 FT ISO)
Max working pressure	***160 bar***
Hydraulic flow	***40-60 L/min***
Electric control voltage	***24 VDC***
Lifting system	***Vertical ISO twistlocks***
Type of stacking	***Normal and block stacking***
Spreader weight	***3'600 Kg (ONLY SPREADER WITHOUT CARRIAGE)***
Colour	***Black grey RAL 7021 (150 µm th.)***

Mec Service Equipment srl
29010, Calendasco (Piacenza)
Zona industriale Pontetrebbia, via Piacenza 45
Mail: info@mecserviceitalia.it
Web: www.mecservice-equipment.com






All specifications are subject to change without notice. A list of options enables you to adapt the product more precisely to your needs and further information is available on request

Mec Service Equipment srl
29010, Calendasco (Piacenza)
Zona industriale Pontetrebbia, via Piacenza 45
Mail: info@mecserviceitalia.it
Web: www.mecservice-equipment.com

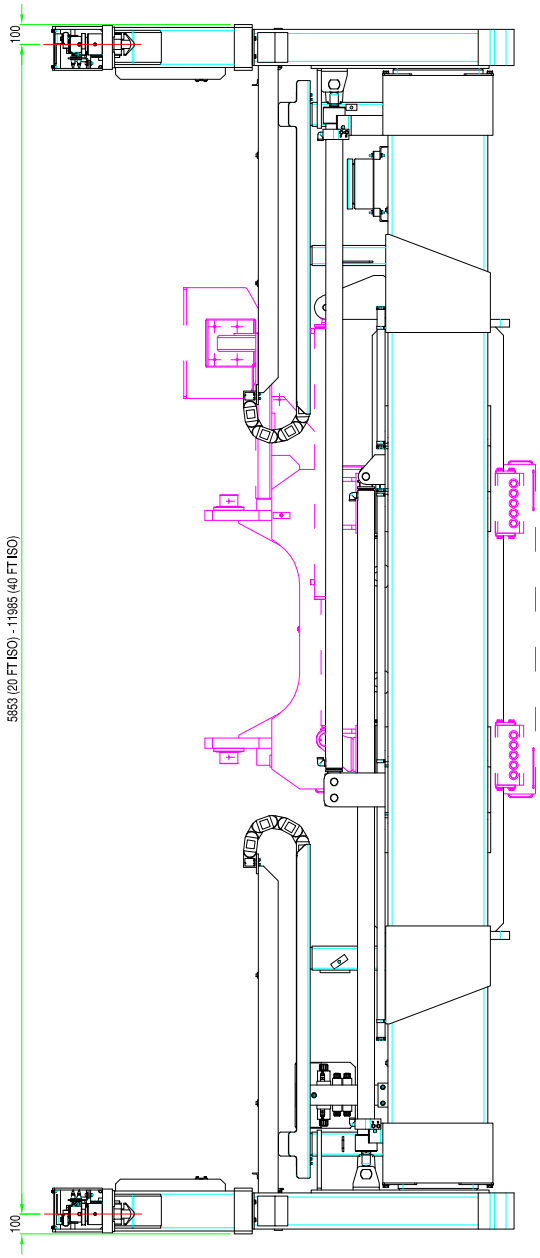
100
5633 (20 FT ISO) - 11985 (40 FT ISO)
100

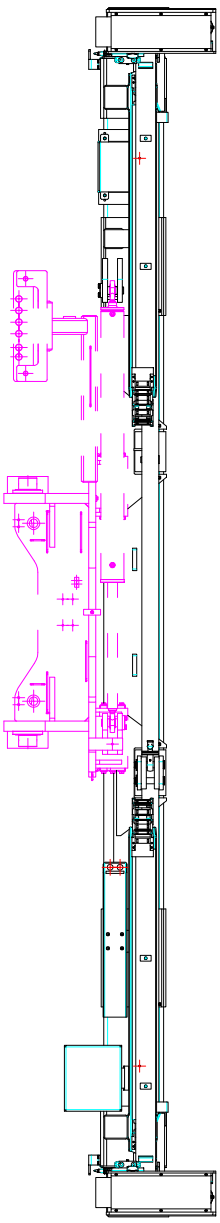

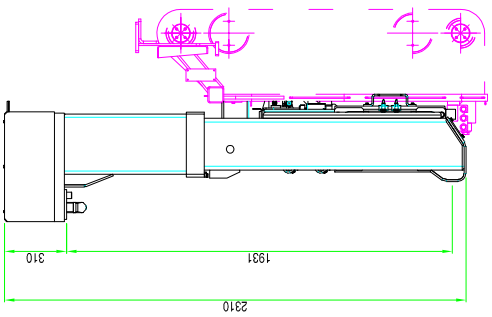
310
1831
2310